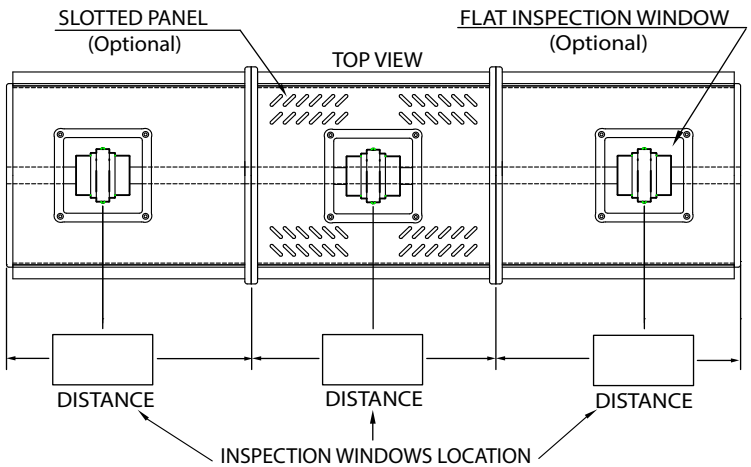

UNIGUARD "JSG" SIZING CHART

JACK SHAFT GUARD

- ALL CUSTOM ORDERS REQUIRE DRAWING OR COMPLETED SIZING CHART
- ALL INSPECTION WINDOWS ARE OPTIONAL
- ALLOW MINIMUM 1/4" CLEARANCE AROUND SHAFT, SHAFT HOLES ARE ACTUAL SIZES
- ALLOW MINIMUM 2.00" CLEARANCE AROUND ALL ROTATING COMPONENTS
- CUSTOM BRACKETS ARE TYPICALLY FABRICATED FOR MOUNTING DURING INSTALLATION
- IF SHAFT HOLES ARE TO BE LEFT BLANK ENTER "0"
- IF ADJUSTABLE ENTER MINIMUM/MAXIMUM LENGTHS
- DEFAULT FRONT PANELS ARE SOLID
- YELLOW MATERIAL IS AVAILABLE UPON REQUEST

OPTIONS

- [x] EQUIPMENT #
- [ ] SLOTTED PANELS (NOTE LOCATION IN NOTES FIELD BELOW)
- [ ] INSPECTION WINDOW (NOTE LOCATION IN NOTES FIELD BELOW)
- [ ] LIFT HANDLES
- [ ] ADJUSTABLE LENGTH — MIN ____ MAX ____
- [ ] 3X4" FLAT INSPECTION WINDOW
- [ ] 4X6" FLAT INSPECTION WINDOW
- [ ] 8X8" FLAT INSPECTION WINDOW
- [ ] FIELD MODIFY

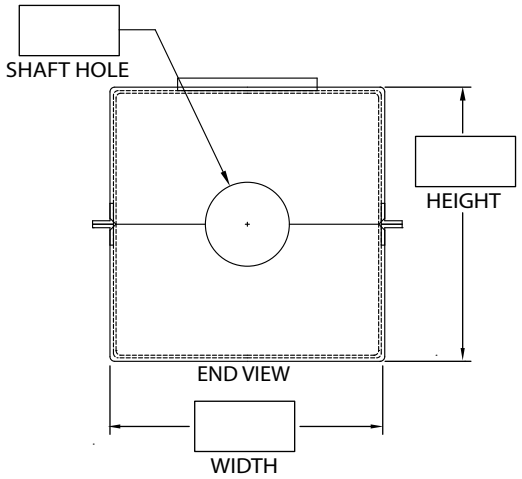

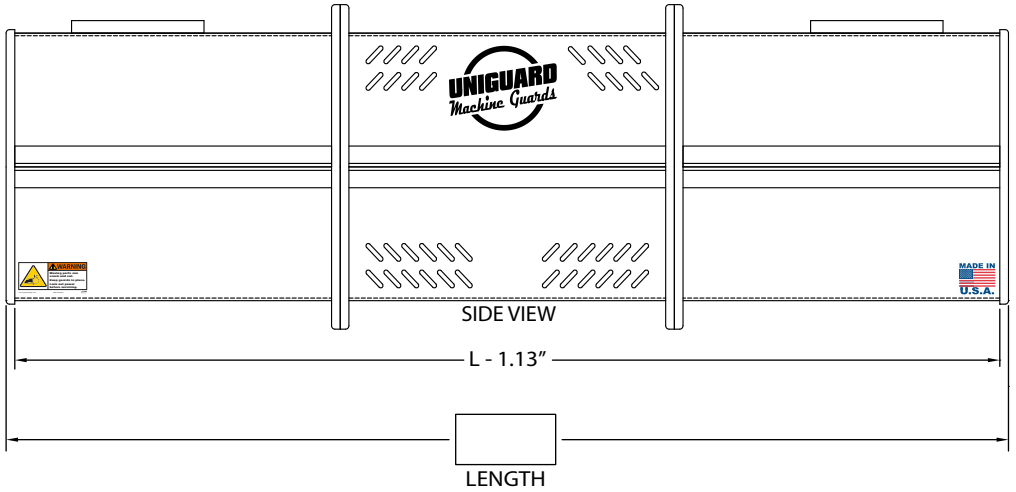

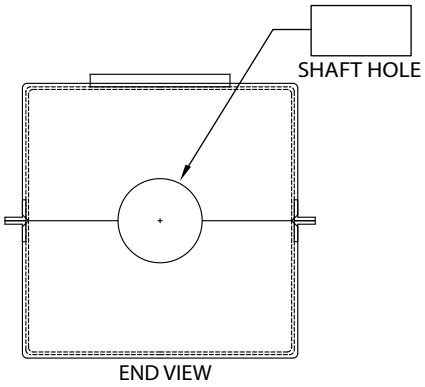

Notes:

Uniguard ™ Machine Guards
1115 Pleasant Ridge Road
Greensboro, N.C. 27409
(888) 549-4622
sales@uniguardmgc.com

Uniguard Customer Name:		End User Company:	Eq. Mfg.:	Qty:
Uniguard Contact Name:		End User Contact Name:	Model:	Equip Numbers:
Phone #:	Date:	Notes:	Notes:	Equip Numbers:
EMail:		Notes:	Notes:	Equip Numbers: